


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H02K 11/00	A1	(11) International Publication Number: WO 00/01054 (43) International Publication Date: 6 January 2000 (06.01.00)
<p>(21) International Application Number: PCT/US99/14753</p> <p>(22) International Filing Date: 29 June 1999 (29.06.99)</p> <p>(30) Priority Data: 60/091,257 30 June 1998 (30.06.98) US</p> <p>(71) Applicant (for all designated States except US): GENERAL ELECTRIC COMPANY [US/US]; One River Road, Schenectady, NY 12345 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): WRIGHT, Kamron, M. [US/US]; 9612 Sea Pines, Fort Waynes, IN 46819 (US). LYTTLE, Peter, B. [US/US]; 7711 Weymouth Court, Fort Wayne, IN 46825 (US). YOUNG, Andrew, N. [US/US]; 5733 Spring Meadow Drive, Roanoke, VA 24018 (US).</p> <p>(74) Agent: BEULICK, John, S.; Armstrong Teasdale LLP, Suite 2600, One Metropolitan Square, St. Louis, MO 63102-2740 (US).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU (Petty patent), AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: MOTOR ENDSHIELD ASSEMBLY FOR AN ELECTRONICALLY COMMUTATED MOTOR

(57) Abstract

An endshield assembly (100) for an electronically commutated motor includes an endshield (100), a control assembly (104) and a power assembly (106). The endshield (100) includes a plurality of recessed fins (132) on an outer surface, and a substantially flat raised portion on an internal surface. The raised portion is in contact with a thermal pad (112). The control assembly (104) includes the thermal pad (112) and a control board (108) on which is located a plurality of power transistors (110). The thermal pad (112) provides thermal contact between the transistors (110) and the endshield (100) to enable the endshield (100) to dissipate heat from the transistors (110). The transistors (110) include a plurality of leads (128) that extend substantially parallel to the control board (108) which enable the leads (128) to be coated for protection against harsh environments. The power assembly (106) includes a power board (138) having an insulator (146) positioned between the power board (138) and the control board (108).

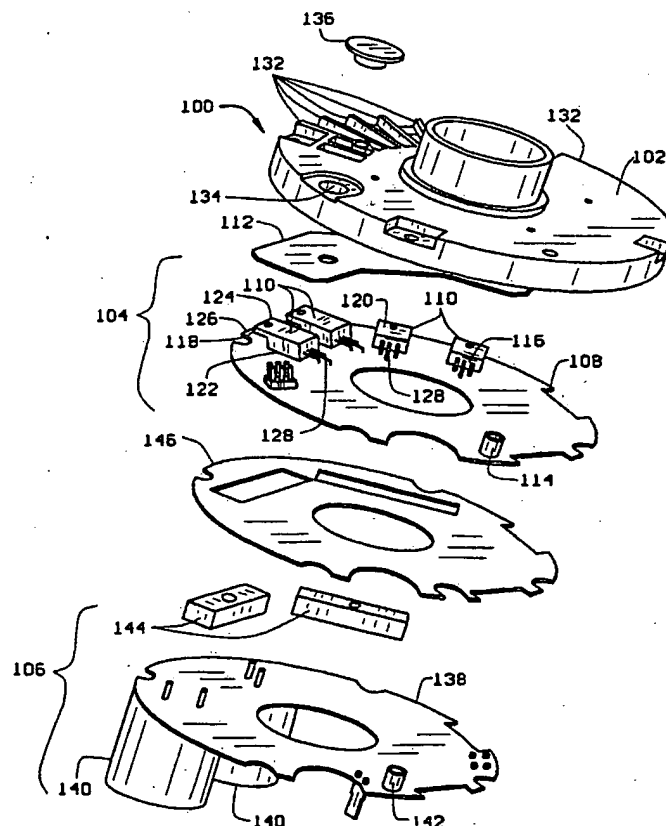

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MOTOR ENDSHIELD ASSEMBLY FOR AN ELECTRONICALLY COMMUTATED MOTOR

BACKGROUND OF THE INVENTION

This invention relates generally to electric motors and more particularly, to an endshield assembly for an electric motor.

Known electronically commutated motors have a multi-stage winding assembly and a magnetic assembly associated for relative rotation. The winding stages of the multi-stage winding assembly have a preset energization sequence that includes at least one unenergized winding stage in which an induced back EMF appears. When integrated over time to a predetermined value, the induced back EMF indicates the instant at which the relative angular position between the multi-stage winding assembly and the magnetic assembly is suitable for the sequential commutation of the next winding stage.

The electronic circuitry for an electronically commutated motor generally includes a power circuit, a regulating circuit, and a control circuit. The power circuit has solid state switching devices for commutating the power supplied to the electronically commutated motor to effect its energization. The regulating circuit has various solid state components for maintaining the power supplied to the electronically commutated motor generally constant. The control circuit has various solid state components for controlling the conductivity of the switching devices.

Some of the solid state components for an electronically commutated motor, e.g., transistors, need to be relatively large to accommodate the currents that must pass through them. Large transistors can produce a sizable amount of heat that should be dissipated from the transistors in order to keep them functioning properly. It is well known in the art that to promote heat dissipation, the electronic circuitry for an electronically commutated motor can be positioned adjacent an outer surface

of an endshield of the motor. However, this increases costs since another compartment is needed to protect the electronic circuitry.

Accordingly, it would be desirable to provide a mounting arrangement for the electronic components of an electronically commutated motor that provides good
5 heat dissipation without significantly increasing the cost of the motor. Additionally, it would be desirable to eliminate the additional compartment needed to protect the electronic circuitry.

BRIEF SUMMARY OF THE INVENTION

Electronically commutated motors are well known, such as the motor described in U.S. Patent No. 5,006,744, which patent is assigned to the present
10 assigned and hereby incorporated herein, in its entirety, by reference.

In an exemplary embodiment of the invention, a motor endshield assembly for an electronically commutated motor includes an endshield having an inner surface and an outer surface, with the outer surface including a plurality of recessed fins. The endshield assembly according to one embodiment of the present invention
15 includes a control assembly and a power assembly mounted thereto. The control assembly includes a control board having a plurality of power transistors. The internal surface of the endshield includes a substantially flat raised area that is in contact with the control assembly and serves as a heatsink for the power transistors. The transistors are in contact with a thermal pad located between the transistors and
20 the endshield. The thermal pad electrically insulates the transistors yet still conducts heat from the transistors to the endshield. The recessed fins are located directly above the substantially flat raised portion on the endshield and assist the dissipation of heat from the transistors and endshield to the ambient environment.

The power assembly includes a power board having an insulator positioned
25 between the power board and the control board. A first spacer extends between the

control board and the power board to provide the proper spacing therebetween. A plurality of clamp bars are also positioned between the power board and the transistors. The clamp bars apply pressure to the transistors and keep the transistors in contact with the substantially flat raised portion of the endshield. The first spacer
5 and the clamp bars extend through the insulator. A second spacer extends between the control board and the endshield to provide the proper spacing therebetween.

In one embodiment, each power transistor includes a plurality of leads that extend substantially parallel to the control board. The leads exit a front side of the transistor at a position that is closer to a bottom of the transistor than to a top. The
10 bottom of the transistor is in contact with the control board while the top of the transistor includes a tab that extends from a back side of the transistor parallel to the control board.

With the above described endshield assembly, only one compartment is required since the electronic controls are located within the motor housing. In
15 addition, use of the endshield as a low impedance path to dissipate heat from the power devices of the internal electronic circuitry to the ambient environment provides good thermal performance for the motor. Also, since the transistor leads are parallel to and away from the control board, the lengths of the leads are much closer to the surface of the board than in many known control assemblies. The leads
20 are thus easy to encapsulate and protect from harsh external environments.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an exploded view of an endshield assembly in accordance with one embodiment of the present invention;

Figure 2 is a perspective view of the endshield shown in Figure 1;

Figure 3 is a cross section of the endshield shown in Figure 2 along A-A;

Figure 4 is a schematic illustration of the thermal pad shown in Figure 1; and

Figure 5 is a schematic illustration of the insulator shown in Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is an exploded view of an endshield assembly 100 for an electronically commutated motor (not shown). Endshield assembly 100 includes an endshield 102, a control assembly 104, and a power assembly 106. Control
5 assembly 102 includes a control board 108, a plurality of transistors 110, a thermal pad 112, and a spacer 114. In one embodiment, spacer 114 is fabricated from nylon and extends between control board 108 and endshield 102. Spacer 114 helps to maintain a predetermined separation distance between control board 108 and
10 endshield 102.

Transistors 110 include a front 116, back 118, top 120, bottom 122, and a tab 124. Tab 124 extends from back 118 of transistors 110 and has a surface 126 that is an extension of, and is substantially parallel to, top 120. A plurality of leads 128 extend from front 116 of transistor 110. In one embodiment, leads 128 extend
15 substantially parallel to control board 108 and maintain a substantially constant separation distance between themselves and control board 108. Since leads 128 extend from front 116 in a location that is closer to control board 108 than to top 120, leads 128 remain relatively close to control board 108 throughout their length. Only a small separation distance exists between leads 128 and control board 108.
20 The small separation distance allows conformal coating to easily encapsulate leads 128 which helps to protect them from damage in harsh environments. The encapsulation of leads 128 facilitates reducing failures caused by moisture in the area of high potential. To insert leads 128 into control board 108, leads 128 must be formed at right angles to transistor 110.

Transistors 110 are capable of producing significant heat depending on the amount of current that flows through them. The heat should be dissipated from the transistors and the surrounding motor in order to ensure proper operation of the motor. In one embodiment, top 120 of each transistor 110 is in thermal contact with thermal pad 112. Thermal pad 112 electrically isolates transistors 110 and conducts the heat generated by transistors 110 away from transistors 110. Thermal pad 112 contacts endshield 102 which includes an inner surface (not shown) and an outer surface 130 that has a plurality of recessed fins 132. In one embodiment, endshield 102 is fabricated from cast aluminum and serves as a heatsink for transistors 110. The inner surface of endshield 102 includes a substantially flat raised portion (not shown). The substantially flat raised portion is in thermal contact with thermal pad 112 and is located directly beneath recessed fins 132. In one embodiment, recessed fins 132 extend from the substantially flat raised portion. The heat from transistors 110 travels through thermal pad 112 to endshield 102 and is dissipated from recessed fins 132 to the ambient environment. Endshield 102 serves as a heat sink to transistors 110 and helps to dissipate heat from transistors 110 to the ambient environment. This heat dissipation helps reduce stress on transistors 110. Endshield 102 further includes a cap plug opening 134 and a cap plug 136 as will be discussed in more detail below.

Power assembly 106 includes a power board 138, electronic components 140, a spacer 142, a plurality of clamp bars 144, and an insulator 146. Insulator 146 is positioned between control board 108 and power board 138 and electrically insulates portions of control board 108 from portions of power board 138. Spacer 142 and clamp bars 144 extend between control board 108 and power board 138. Spacer 142 and clamp bars 144 facilitate maintaining a predetermined distance between power board 142 and control board 108. Spacer 142 and clamp bars 144 extend through insulator 146 and are in contact with both control board 108 and power board 138. In one embodiment, spacer 142 is fabricated from nylon.

Clamp bars 144 are positioned on an opposite side of power board 138 from electronic components 140 and are located between electronic components 140 and transistors 110. Clamp bars 144 apply pressure on transistors 110 to ensure a good thermal interface between transistors 110 and endshield 102.

5 Figure 2 is a perspective view of endshield 102. Endshield 102 includes a shaft opening 148 for a rotor bearing (not shown). In one embodiment, outer surface 130 of endshield 102 includes a raised cylinder 150 that projects from endshield 102 and surrounds opening 148. Raised cylinder 150 includes a resilient ring (not shown) mounted therein. Endshield 102 further includes a plurality of bolt
10 openings 152. Bolt openings 152 extend through endshield 102 and through bolts (not shown) are inserted therethrough to mount endshield 102 to the shell of an electronically commutated motor (not shown). Cap plug opening 134, as explained above, extends through endshield 102 and allows access to internal components (not
15 shown) during final testing and calibration. Cap plug opening 134 permits access to the internal components without having to remove endshield 102. Cap plug 136 (not shown in Figure 2) covers cap plug opening 134 to protect the internal components.

 Figure 3 is a cross-section view of endshield 102 and illustrates an inner surface 154 that includes a substantially flat raised portion 156. Raised portion 156
20 is located directly beneath recessed fins 132 and is a component of a thermal pathway between transistors 110 (not shown in Figure 3) and recessed fins 132. Recessed fins 132 extend from raised portion 154 to increase the surface area of outer surface 130 which facilitates the dissipation of heat from endshield 102. Raised cylinder 150 and bolt opening 152 are also illustrated in Figure 3.

25 Figure 4 is a schematic illustration of thermal pad 112. In one embodiment, thermal pad 112 includes angled sides to permit increased contact with a portion of

endshield 102 (not shown in Figure 4). Thermal pad 112 has two openings 158 to help secure thermal pad 112 to the endshield.

Figure 5 is a schematic illustration of insulator 146. Insulator 146 includes two openings 160 through which clamp bars 144 (not shown in Figure 5) extend. Openings 160 are generally rectangular in shape and are positioned in close proximity to each other. Insulator 146 also includes a shaft opening 162 through which a shaft (not shown) of the electronically commutated motor extends. Insulator 146 is fabricated from mylar and provides both thermal and electrical insulation. Insulator 146 also includes a spacer opening 164 through which spacer 142 (not shown in Figure 5) extends.

Endshield assembly 100 includes a thermal pathway that allows heat to be dissipated from the interior of endshield assembly 100, to the ambient environment. This thermal pathway enables control assembly 104 and power assembly 106 to be placed within the interior of the electronically commutated motor housing. This interior placement eliminates the need for a separate compartment to house the electronic controls of the motor, and facilitates reducing fabrication costs of the motor. In addition, the orientation of the transistor leads enables the leads to be encapsulated and protected from potentially harsh environmental conditions.

While the invention has been described in terms of various specific embodiments, those skilled in the art will recognize that the invention can be practiced with modification within the spirit and scope of the claims.

Claims:

1. A motor endshield assembly comprising:

an endshield comprising an outer surface and an inner surface, said outer surface including a plurality of fins;

a control assembly in contact with said inner surface; and

5 a power assembly connected to said control assembly.
2. A motor endshield assembly in accordance with Claim 1 wherein said inner surface further comprises a substantially flat raised area for contacting said control assembly.
3. A motor endshield assembly in accordance with Claim 1 wherein said
10 control assembly comprises a control board and a plurality of power transistors connected to said control board.
4. A motor endshield assembly in accordance with Claim 1 wherein said control assembly further comprises a thermal pad placed between said power transistors and said endshield, said thermal pad for transferring heat from said
15 transistors to said endshield and for electrically isolating said transistors.
5. A motor endshield assembly in accordance with Claim 1 wherein said endshield is configured as a heatsink.
6. A motor endshield assembly in accordance with Claim 3 wherein each said power transistor comprises a plurality of leads, each said lead extending
20 substantially parallel to said control board.
7. A motor endshield assembly in accordance with Claim 6 wherein said transistors comprise a top surface, a bottom surface, a front, a back, and a tab, said

bottom surface contacting said control board, said tab extending from said back along said top surface.

8. A motor endshield assembly in accordance with Claim 7 wherein said power transistor leads extend from said front of said power transistors at a position
5 that is closer to said bottom surface than to said top surface.

9. A motor endshield in accordance with Claim 8 wherein said tabs comprise metal, said tabs contact said thermal pad which provides a thermal interface to said endshield.

10. A motor endshield assembly in accordance with Claim 2 wherein said
10 recessed fins extend from said substantially flat raised portion.

11. A motor endshield assembly in accordance with Claim 1 further comprising a cap plug opening extending through said endshield and a cap plug covering said cap plug opening.

12. A motor endshield assembly in accordance with Claim 1 wherein said
15 endshield further comprises aluminum.

13. A motor endshield assembly in accordance with Claim 3 wherein said power assembly comprises a power board and an insulator positioned between said power board and said control board.

14. A motor endshield assembly in accordance with Claim 13 further
20 comprising:

a first spacer extending between said control board and said power assembly;

a plurality of clamp bars positioned between said power assembly and said power transistors, said first spacer and said clamp bars extending through said insulator; and

a second spacer extending between said control board and said endshield.

15. A motor endshield assembly in accordance with Claim 1 wherein said endshield further comprises a plurality of bolt openings that extend through said endshield for receiving a through bolt.

5 16. A motor endshield for an electronically commutated motor, said endshield comprising:

an internal surface comprising a substantially flat raised area;

an external surface comprising a plurality of recessed fins and a raised cylindrical portion surrounding said opening; and

10 a shaft opening configured to receive a motor shaft.

17. A motor endshield in accordance with Claim 16 wherein said recessed fins extend from said substantially flat raised portion.

18. A motor endshield in accordance with Claim 16 further comprising a cap plug opening extending through said endshield.

15 19. A motor endshield in accordance with Claim 16 further comprising a plurality of recessed openings extending through said endshield, each said recessed opening for receiving a through bolt.

20. A motor endshield in accordance with Claim 16 wherein said endshield further comprises aluminum, said endshield configured as a heatsink.

20 21. A method of assembling a motor endshield assembly for an electronically commutated motor, the motor endshield assembly including a control assembly, a power assembly, and an endshield with an inner surface and an outer surface, said method comprising the steps of:

positioning the control assembly in contact with the inner surface of the endshield; and

connecting the power assembly to the control assembly.

22. A method in accordance with Claim 21 wherein the control assembly includes a thermal pad and a control board with power transistors connected thereto, said step of positioning further comprising the steps of:

positioning the power transistors in thermal contact with the thermal pad; and

placing the thermal pad in contact with the endshield.

23. A method in accordance with Claim 22 wherein the endshield inner surface includes a substantially flat raised portion, and the endshield outer surface includes a plurality of recessed fins, the recessed fins extending from the raised portion, said method of placing the thermal pad comprising the step of placing the thermal pad in contact with the substantially flat raised portion of the endshield such that the power transistors are in thermal contact with the recessed fins, wherein a thermal pathway is provided to dissipate heat from the transistors to the recessed fins and then to the ambient environment.

24. A method in accordance with Claim 23 wherein the power assembly includes an insulator, a plurality of clamp bars, a spacer, and a power board, and wherein said step of connecting the power assembly to the control assembly comprises the step of placing the power assembly in contact with the control board.

25. A method in accordance with Claim 24 wherein said method further includes the step of positioning the clamp bars to apply pressure to the transistors to enhance the thermal contact between the transistors and the recessed fins of the endshield.

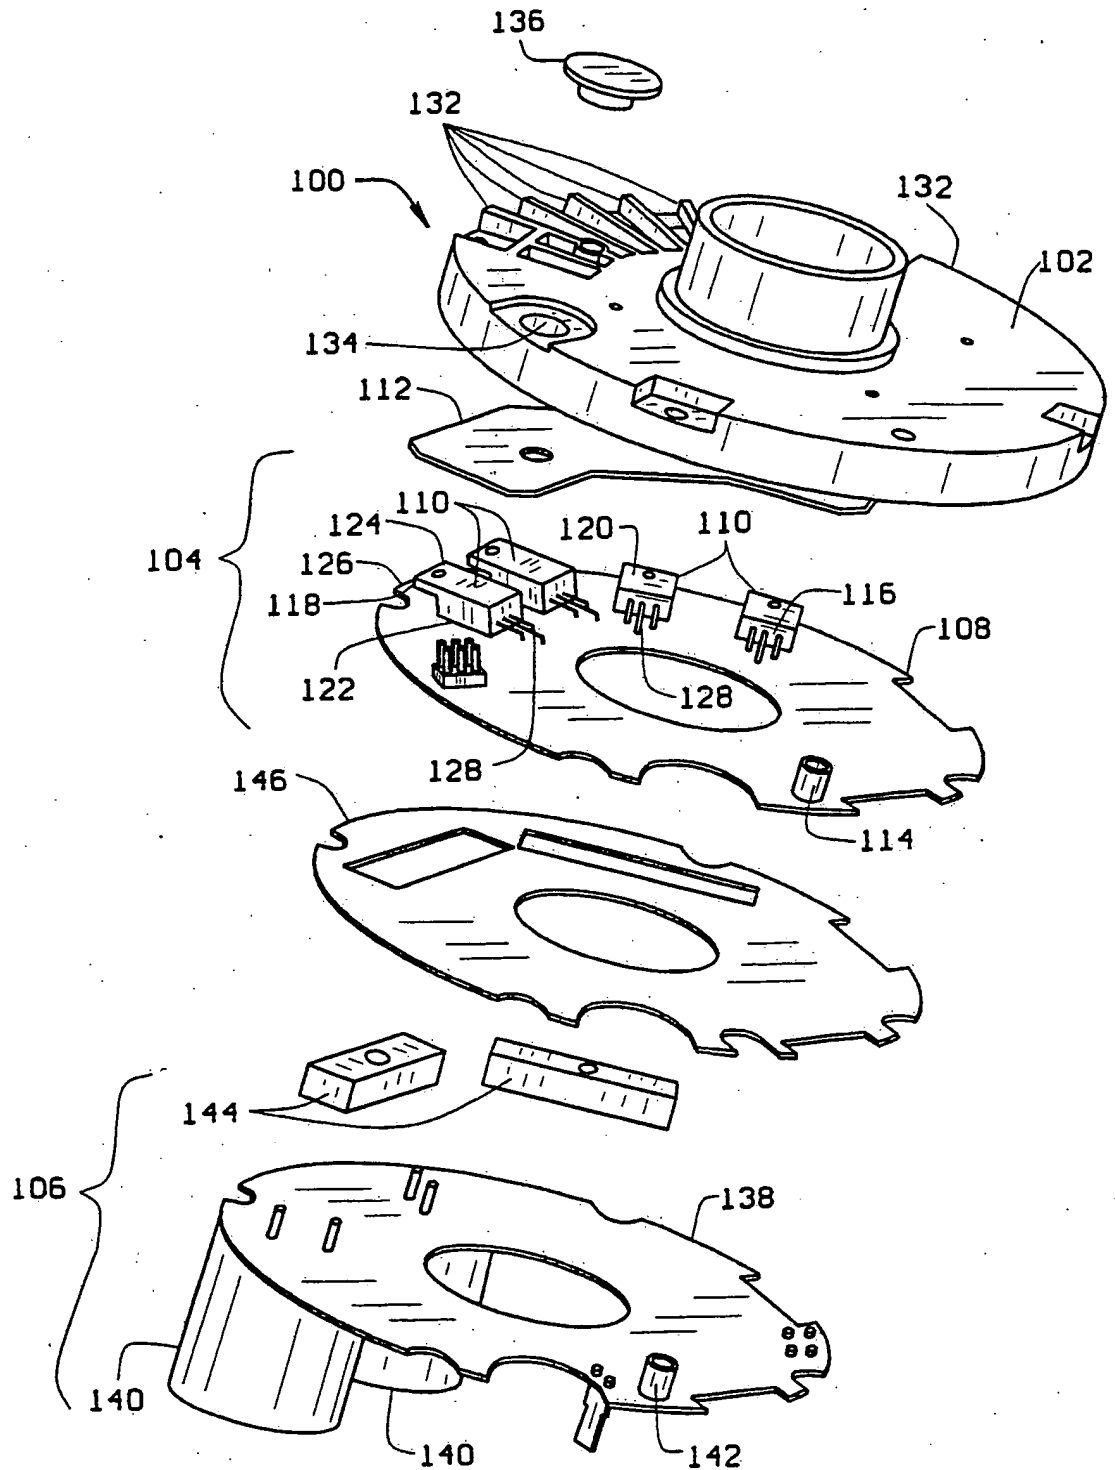


FIG. 1

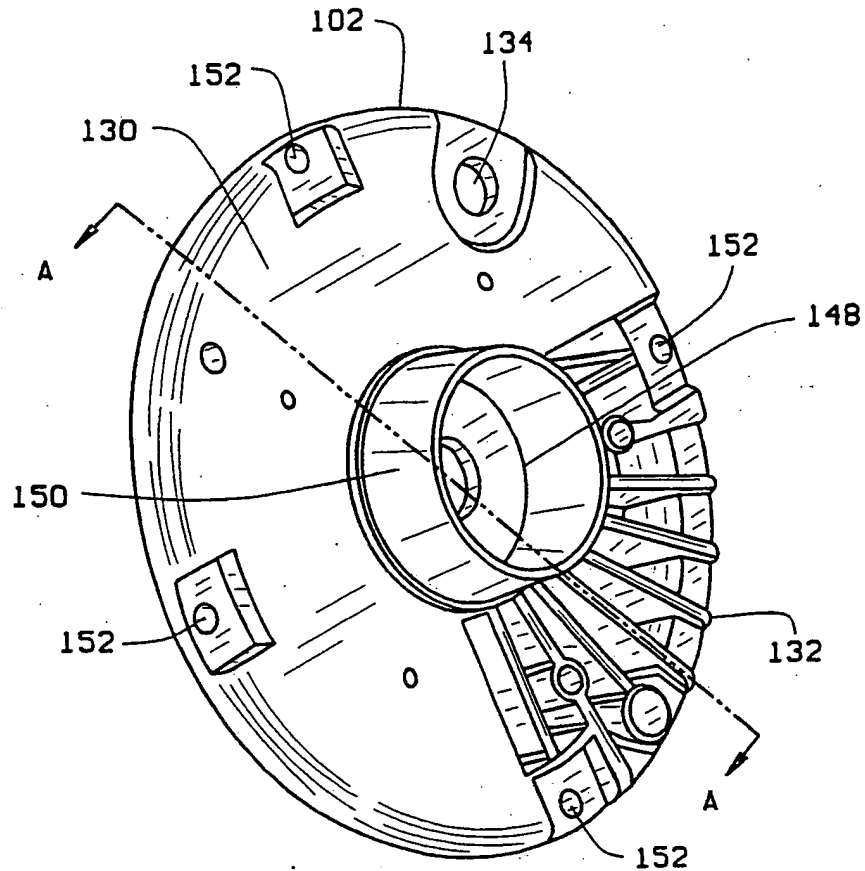


FIG. 2

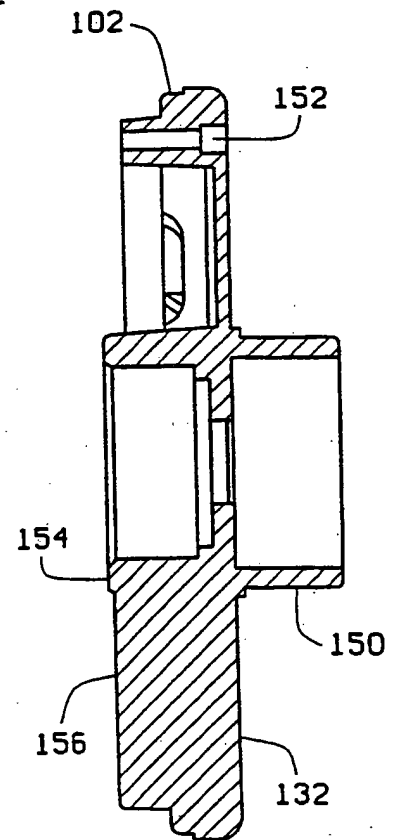


FIG. 3

2/3

SUBSTITUTE SHEET (RULE 26)

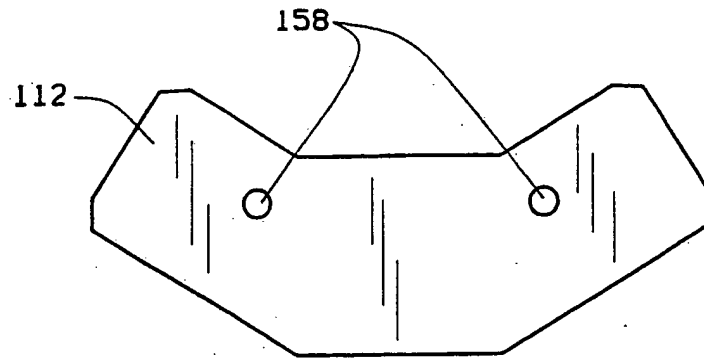


FIG. 4

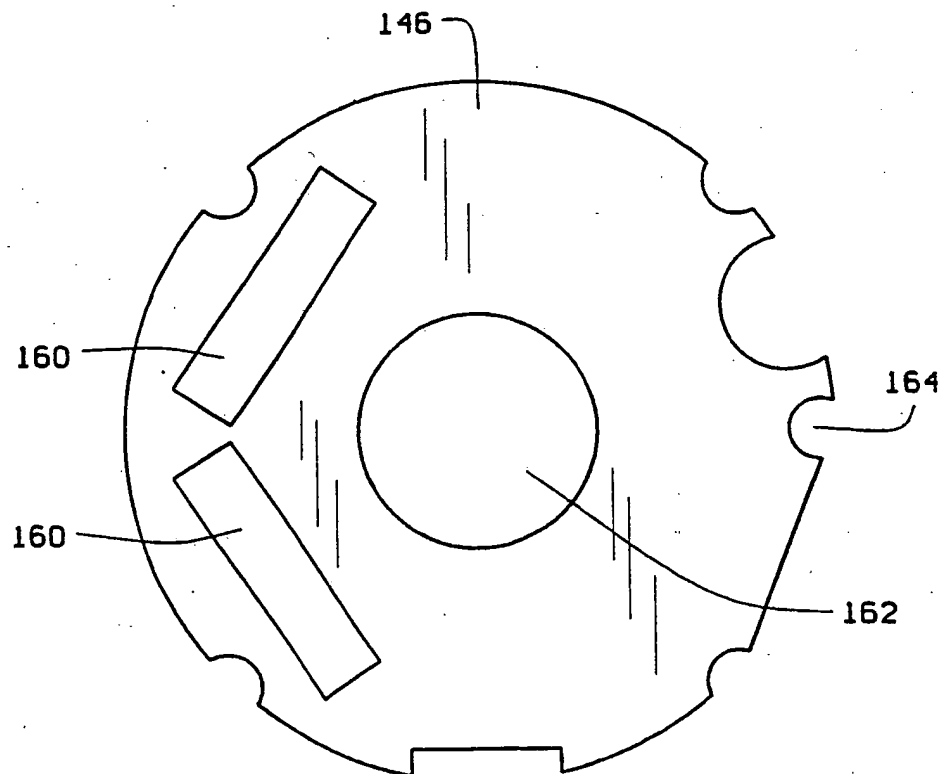


FIG. 5

3/3

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/14753

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H02K 11/00

US CL : 310/89,68R,64,71,89,91,58; 29/596

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 310/89,68R,64,71,89,91,260,58; 29/596

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

U.S. PTO APS, U.S. PTO WEST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,266,152 A (Herr et al.) 05 May 1981 (05.05.81), see Col 4, line 54.	1-25
Y	US 4,668,898 A (Harms et al.) 26 May 1987 (26.05.87), see abstract.	1-25
Y	US 5,825,107 A (Johnson et al.) 20 October 1998 (20.10.98), see abstract.	4-20, 22-25
Y	US 5,714,816 A (Jensen et al.) 03 February 1998 (03.02.98), see abstract.	1-25
Y	US 5,757,096 A (DuBois et al.) 26 May 1998 (26.05.98), see abstract.	1-25
A	US 5,543,671 A (Williams) 06 August 1996 (06.08.96), see entire document.	1-20

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 AUGUST 1999

Date of mailing of the international search report

19 OCT 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3431

Authorized officer

SAEED GHAHRAMANI

Telephone No. (703) 305-1527

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/14753

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,770,902 A (Batten et al.) 23 June 1998 (23.06.98), see entire document.	1-20
A	US 5,939,807 A (Patyk et al.) 17 August 1999 (17.08.99), see entire document.	1-20

Form PCT/ISA/210 (continuation of second sheet)(July 1992)★